

Single Drum Vibratory Rollers

RS 800A RSS 800A

Ideal for smaller repair and maintenance jobs

»» Lightweight and highly maneuverable roller has infinitely variable hydrostatic drive for smooth, even accelerations. Excellent choice for the compaction of sand, gravel, soil and asphalt on roadways, walkways, bridges and parking lots. High curb clearance and close side clearance accommodates work adjacent to curbs and walls. ««



WACKER

- ▣ Reliable
- ▣ Trustworthy
- ▣ Accessible
- ▣ Responsive

Additional Advantages:


- + Beveled edge steel drum has adjustable and reversible polyurethane self-cleaning scrapers to prevent soil and asphalt buildup between the frame and the drum giving smooth and uniform surfaces.
- + Automatic braking system in forward and reverse for greater operator safety.
- + Transport drive system is fully enclosed, increasing component life for continued operation and higher production. Maintenance-free drum drive is also fully enclosed to eliminate dirt and grease accumulation, reducing service time and increasing productivity
- + Adjustable, enclosed handle improves operator comfort and folds vertically for convenient transportation and storage.
- + Large water tank reduces stops for refilling for continued operation and high productivity. Snap-out sprinkling system and in-line filter screen are easily cleaned, reducing downtime.



Technical Data		RS 800A	RSS 800A
Operating weight	lb (kg)	975 (440)	1000 (450)
Drum diameter	in (mm)	22 (560)	22 (560)
Drum width	in (mm)	28.3 (720)	28.3 (720)
Overall size (l x w x h)	in (mm)	84 x 33 x 50 (2135 x 840 x 1270)	85.5 x 33 x 50 (2170 x 840 x 1270)
Curb clearance (R and L)	in (mm)	6/16 (150/410)	6/16 (150/410)
Side clearance (R and L)	in (mm)	.9/3.5 (24/90)	.9/3.5 (24/90)
Water tank capacity	gal (l)	8 (30)	8 (30)
Shipping weight	lb (kg)	1025 (465)	1050 (477)
Shipping size (l x w x h)	in (mm)	45 x 38 x 85 (1145 x 965 x 2160)	45 x 38 x 85 (1145 x 965 x 2160)
Engine type		air-cooled, 4-cycle, single cylinder, Honda gasoline	
Starting system		Recoil	12V Electric & Recoil
Displacement	in ³ (cm ³)	20.5 (337)	20.5 (337)
Maximum power	hp (kW)	11 (8.2)	11 (8.2)
Operating speed	rpm	2400	2400
Fuel consumption	gal (l)/h	.9 (3.5)	.9 (3.5)
Fuel tank capacity	gal (l)	1.8 (7)	1.8 (7)
Total centrifugal force	lb (kN)	3400 (15.2)	3400 (15.2)
Frequency	vpm (Hz)	4200 (70)	4200 (70)
Static linear force	lb/in (N/mm)	34.5 (6)	35.3 (6.1)
Dynamic linear force	lb/in (N/mm)	120 (21)	120 (21)
Transmission		Hydrostatic	Hydrostatic
Variable speeds	Forward	mph (km/h) ft (m)/min	0-2.3 (0-3.7) 0-200 (0-61)
	Reverse	mph (km/h) ft (m)/min	0-1.7 (0-2.7) 0-150 (0-46)
Max. area capacity	ft ² (m ²)/h	up to 28,300 (2630)	up to 28,300 (2630)
Maximum gradeability	%	30	30

Standard Package	
Single Drum Vibratory Rollers RS 800A RSS 800A	includes operator's manual and parts book

Model Guide
R = Roller, S = Single drum, S = Electric start 800 = Drum width A = Honda
Please refer to our Price List and Ordering Guide for complete accessory information.

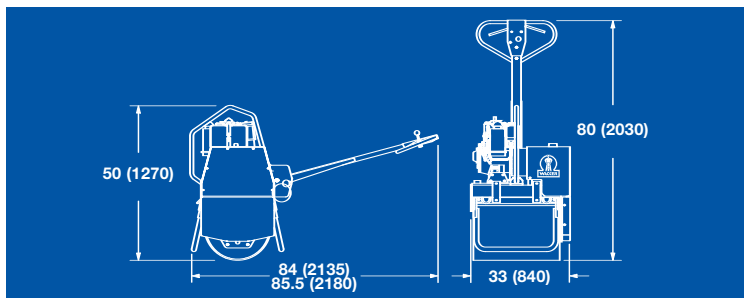

Specifications may change due to continuous product development.